




Front view and mounting

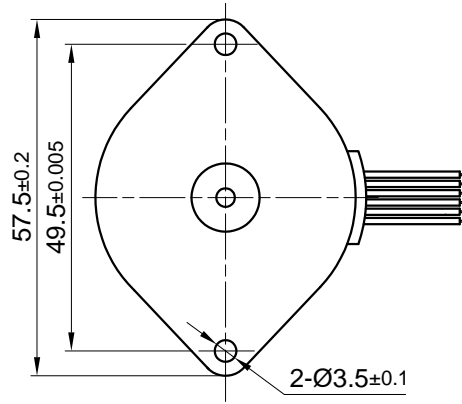

Side view

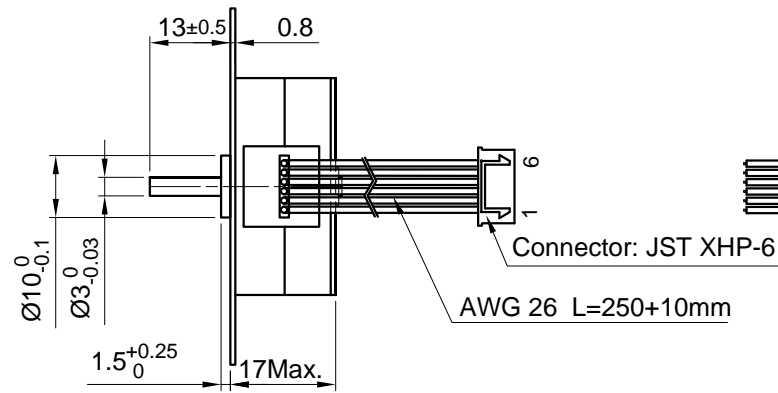


Rear view

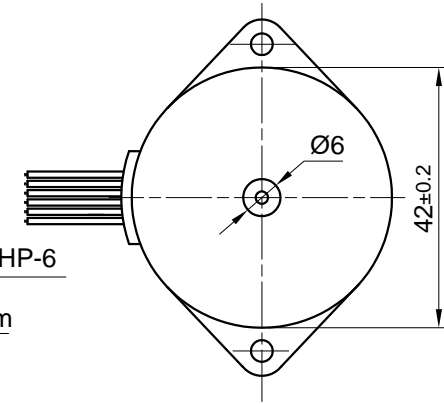

SPECIFICATION	CONNECTION	
	UNIPOLAR OR BIPOLAR-1 WINDING	BIPOLAR SERIAL
VOLTAGE (VDC)	5.0	7.0
AMPS/PHASE	0.59	0.41
RESISTANCE/PHASE (Ohms)@25°C	8.6±10%	17.2±10%
INDUCTANCE/PHASE (mH) @1KHz	4.5±20%	18±20%
HOLDING TORQUE (Nm) [lb-in]	0.05 [0.443]	0.07 [0.62]
DETENT TORQUE (Nm) [lb-in]	0.01 [0.089]	
STEP ANGLE (°)	7.5	
STEP ACCURACY (NON-ACCUM)	±7%	
ROTOR INERTIA (Kg-m <sup>2</sup> ) [lb-in <sup>2</sup> ]	9.6x10 <sup>-7</sup> [3.279x10 <sup>-3</sup> ]	
WEIGHT (Kg) [lb]	0.011 [0.243]	

PERMISSIBLE RADIAL+AXIAL FORCE

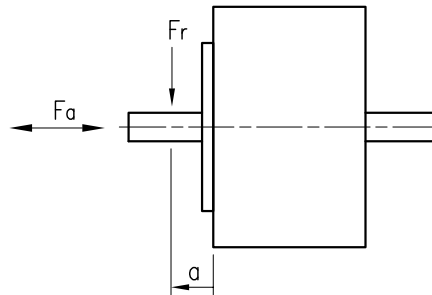


TEMPERATURE RISE: MAX.80°C (MOTOR STANDSTILL; FOR 2 PHASE ENERGIZED)	AXIAL-FORCE Fa (N)	Fa=2.0
AMBIENT TEMPERATURE -20~ 50°C [-4°F ~ 122°F]	DISTANCE a (mm)	1/2 SCHAFTLENGTH
INSULATION RESISTANCE 100 MOhm (UNDER NORMAL TEMPERATURE AND HUMIDITY)	RADIAL-FORCE Fr (N)	Fr=5.0
INSULATION CLASS B 130° [266°F]		AXIAL RADIAL
DIELECTRIC STRENGTH 500VAC FOR 1 MIN. (BETWEEN THE MOTOR COILS AND THE MOTOR CASE)	SHAFT PLAY (mm)	0.08 0.06
AMBIENT HUMIDITY MAX. 85% (NO CONDENSATION)	AT LOAD MAX: (N)	4.5 4.5

UNIPOLAR	TYPE OF CONNECTION (EXTERN)		MOTOR		
	1WINDING	SERIAL	CONNECTOR PIN NO.	LEADS	WINDING
A ---	A ---	A ---	1	WHT	A
COM ---	COM ---	COM ---	5	BLK	COM
A\ ---	A\ ---	A\ ---	3	RED	A\
B ---	B ---	B ---	2	BLU	B
COM ---	COM ---	COM ---	6	BRN	COM
B\ ---	B\ ---	B\ ---	4	YEL	B\

for >speed ←  
for <speed ←

FULL STEP 2 PHASE-Ex.,  
WHEN FACING MOUNTING END (X)

STEP	A	B	A\	B\	CCW	CW
1	+	+	-	-	↓	↑
2	-	+	+	-	↓	↑
3	-	-	+	+	↓	↑
4	+	-	-	+	↓	↑

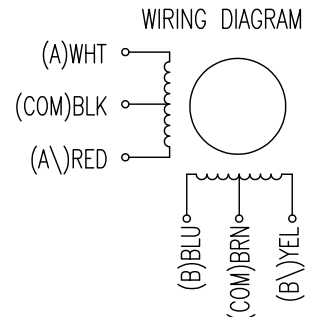

REV	DESCRIPTION	DATE	APVD

NANOTEC:  
SP4275S0606-A

SCALE FREE	APVD	<i>S.Ha.</i>	12.03.07
X ±0.5	CHKD		
1PL ±0.2	DRN	<i>J.W.</i>	06.03.07
2PL ±0.1	SIGNATURE		
ANGLE ±30'	DATE		

**STEPPING MOTOR**

DWG.NO

SP4275S0606-A