




Front view and mounting



Side view

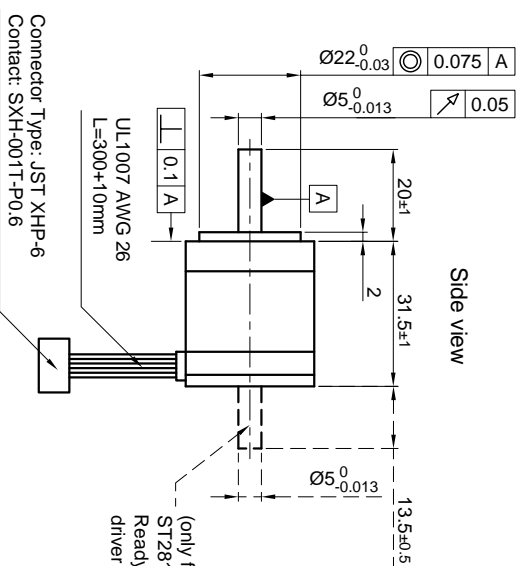


Rear view



CONNECTION	UNIPOLAR OR BIPOLAR-1 WINDING	BIPOLAR SERIAL
VOLTAGE (VDC)	2.66	3.75
AMPS/PHASE	0.95	0.67
RESISTANCE/PHASE (Ohms)@25°C	2.8±15%	5.6±15%
INDUCTANCE/PHASE (mH) @1KHz	1.0±20%	4.0±20%
HOLDING TORQUE (Nm) [lb-in]	0.05 [0.443]	0.071 [0.626]
DETTENT TORQUE (Nm) [lb-in]	2.5x10 ⁻³ [0.0222]	
STEP ANGLE (°)		1.8
STEP ACCURACY (NON-ACCUM)		±5%
ROTOR INERTIA (kg-m ²) [lb-in ²]	9x10 ⁻⁷ [3.074x10 ⁻³]	
WEIGHT (kg) [lb]		0.11 [0.242]
TEMPERATURE RISE: MAX.80°C (MOTOR STANDSTILL; FOR 2 PHASE ENERGIZED)		
AMBIENT TEMPERATURE -10°~ 50°C [14°F ~ 122°F]		
INSULATION RESISTANCE 100 MΩhm (UNDER NORMAL TEMPERATURE AND HUMIDITY)		
INSULATION CLASS B 130° [266°F]		
DIELECTRIC STRENGTH 500VAC FOR 1 MIN. (BETWEEN THE MOTOR COILS AND THE MOTOR CASE)		
AMBIENT HUMIDITY MAX. 85% (NO CONDENSATION)		

PERMISSIBLE RADIAL+AXIAL FORCE	AXIAL-FORCE F _a (N)	F _a =7
DISTANCE a (mm)	5	10
RADIAL-FORCE F _r (N)	58	36
AXIAL PLAY (mm)	0.075	0.025
SHAFT PLAY (mm)		
AT LOAD MAX: (N)	10	5.0

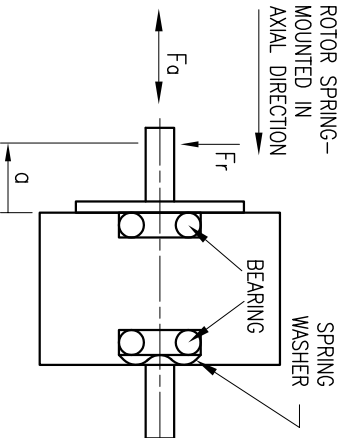

TYPE OF CONNECTION (EXTERN)	UNIPOLAR	BIPOLAR 1WINDING	BIPOLAR SERIAL	CONNECTOR PIN NO.	LEADS	WINDING
A	COM	COM	A	1	BLK	A
A\	COM	COM	A\	5	YEL	COM
B	COM	COM	B	3	GRN	A\
B\	COM	COM	B\	2	RED	B
				6	WHT	COM
				4	BLU	B\

for >speed →
for <speed ←

FULL STEP 2 PHASE-Ex,
WHEN FACING MOUNTING END (X)

STEP	A	B	A\	B\	CW
1	+	+	-	-	↑
2	-	+	+	-	↑
3	-	-	+	+	↓
4	+	-	-	+	↓

WIRING DIAGRAM

STEPPING MOTOR

SCALE FREE: X ±0.5, 1PL ±0.2, 2PL ±0.1, ANGLE ±30°

CHKD: DRN

SIGNATURE: **J.W.**

DATE: 06.06.06

DWG.NO: DWG.NO

DATE: 06.06.06

DATE: 06.06.06

REV	DESCRIPTION	DATE	APVD	DESCRIPTION	DATE	APVD
				NANOTEC:		
				ST2818S1006		